


Specification

Nominal Voltage		12V
Rated Capacity (20 hour rate)		42Ah
Dimensions	Total Height (with terminals)	175mm
	Length	199mm
	Width	167mm
Weight		Approx. 14Kg


Characteristics* :

Capacity 770F (25°C)	20 hour rate (2.1A) upto 10.5V 10 hour rate (3.91A) upto 10.5V 5 hour rate (7.14A) upto 10.2V 1 hour rate (27A) upto 9.6V 15 minute Rate (79A) upto 7.8V	42Ah 39Ah 35.7Ah 27Ah 19.75Ah
Internal Resistance	Full charged Battery 81°F (27°C)	7.6 mΩ
Capacity affected by (temperature 20 hour rate)	104°F (40°C) 81°F (27°C) 32°F (0°C) 5°F (-15°C)	110% 100% 80% 60%
Self discharge 88°F (27°C)	Capacity after 3 month storage Capacity after 6 month storage	90% 85%
Terminal	B6	
Max. discharge current 81°F (27°C)	630 A (5S)	
Short circuit current	1644.8 A	

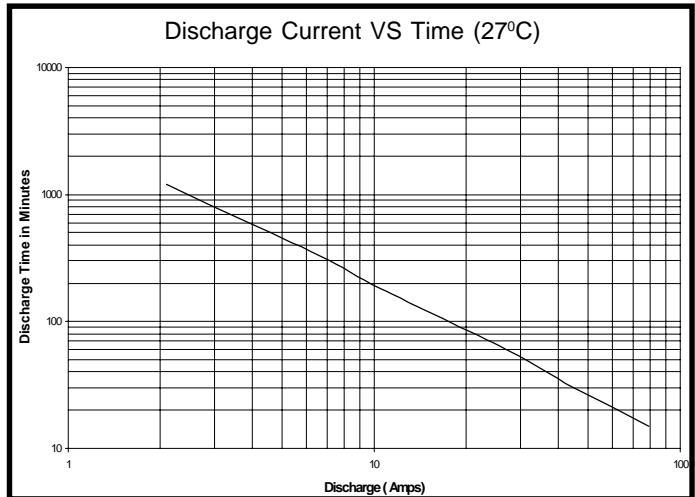

Constant power discharge rating watts per battery at 27°C *

ECV	TIME									
	5min	10min	15min	20min	30min	60min	2hrs	3hrs	5hrs	8hrs
1.8	1395	1010	800	672	505	305	180	130	89	58
1.7	1555	1092	842	693	520	320	185	132	90	59
1.6	1639	1136	882	715	565	330	192	134	91	60

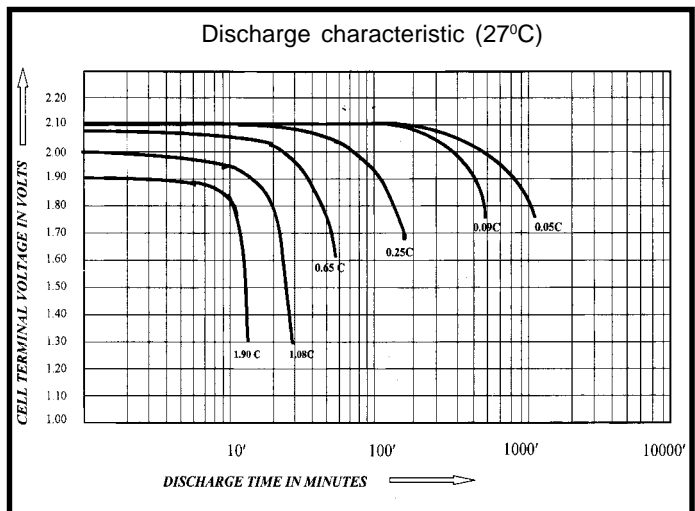


CONSTANT CURRENT DISCHARGE RATINGS-AMPERES AT 27°C*


Duration ECV	5min	10min	15min	20min	30min	60min	2hrs	3hrs	5hrs	8hrs	10hrs	20hrs
1.3	168.00	105.00	80.77	64.62	46.67							
1.55	150.00	97.67	77.78	61.76	46.15	28.38						
1.6	139.53	94.85	75.81	60.17	45.65	27.27	16.54	11.31	7.78	4.83	4.08	2.25
1.7	126.13	89.08	69.31	55.78	42.00	26.58	15.20	10.62	7.20	4.62	3.98	2.14
1.75	123.53	85.71	67.74	55.26	41.58	26.25	15.00	10.61	7.18	4.59	3.91	2.10
1.8	118.98	84.00	66.67	53.85	41.18	25.12	14.89	10.55	7.12	4.57	3.89	2.09

* The above data are average values, and can be obtained within 3 charge / discharge cycles.

OPEN CIRCUIT VOLTAGE VS % STATE OF CHARGE

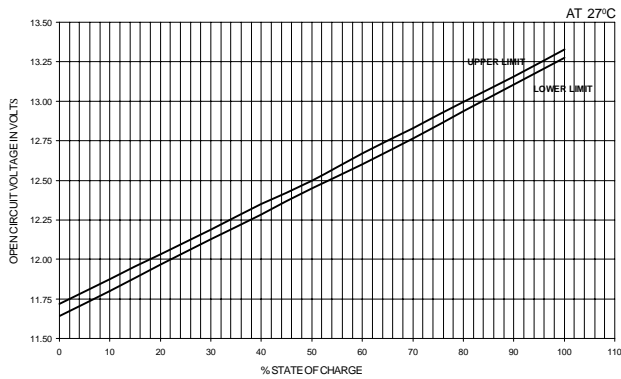


SELF DISCHARGE CHARACTERISTIC

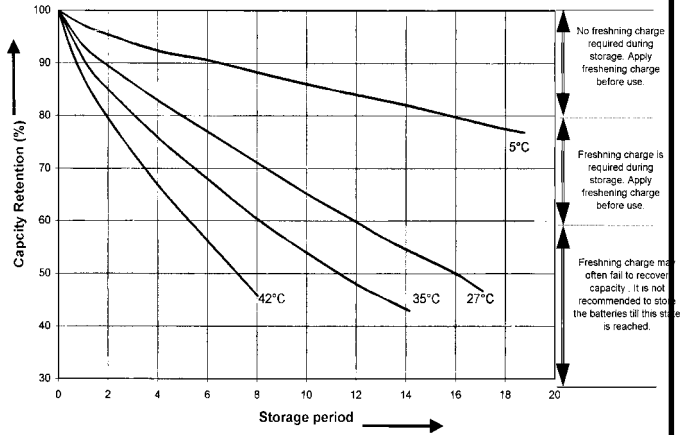


CYCLIC SERVICE LIFE IN RELATION TO DEPTH OF DISCHARGE

SPEC: JIS 8702C


AT 27°C

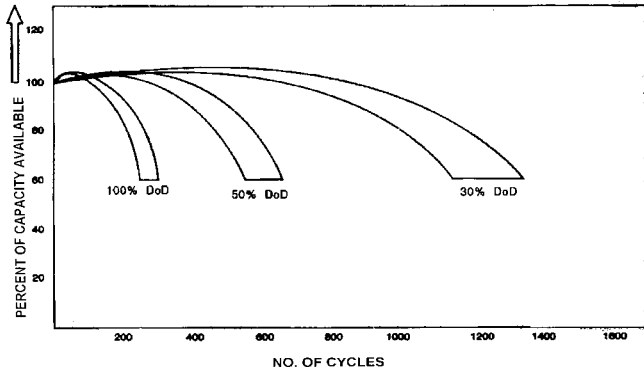

TEMPERATURE EFFECT IN RELATION TO BATTERY CAPACITY

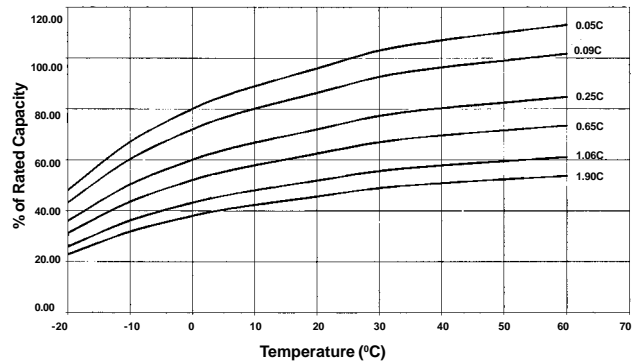

CONSTANT VOLTAGE CHARGING CHARACTERISTIC

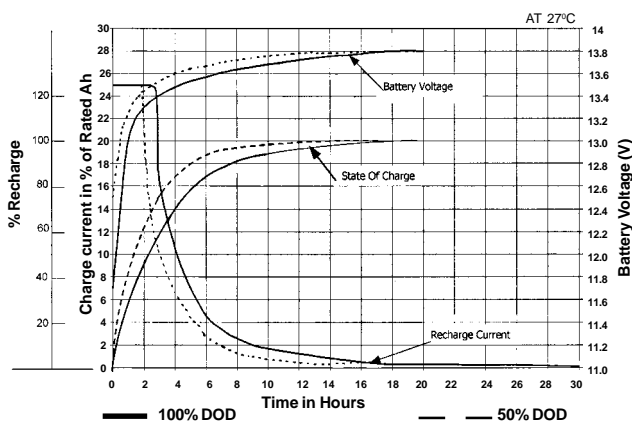

CHARGING METHODS:

Constant Voltage Charging at 27°C.

Standby use	:charging voltage 13.5volts/Battery
Max.Charging current	:25% of rated capacity
Cyclic use	:Charging voltage 13.8volts/Battery
Max.Charging current	:25% of rated capacity
Temperature compensation	: -5 mV / °C

AMARA RAJA BATTERIES LTD.

(An Amara Raja - Johnson Controls Company)

Regd. Office:
 Manufacturing Facilities & Central Distribution Centre.
 Karakambadi - 517 520 TIRUPATI --AP INDIA.
 ☎ : 0877-2285561, : 0877-2285600
 e-mail: amararaja@amararaja.co.in

Corporate Operations Office:
 Corporate Marketing Office & Customer Support Centre
 12, Kodambakkam High Road, Chennai - 600 034, India.
 ☎ : +91-44-821 3270, : +91-44-828 4821

CAUTION :

- Avoid short circuit
- Do not charge in a sealed container.

Quality Systems Certified to
 EN ISO 9001: 1994
 QS-9000:1998
 EN ISO 14001:1996



LONG LIFE UPS BATTERY FROM THE MAKERS OF **AMARA**